



Saves leakage. Saves Water.



- Waterproofing membrane
- For tap and pipe joints
- Good flexibility
- Resistant to ageing

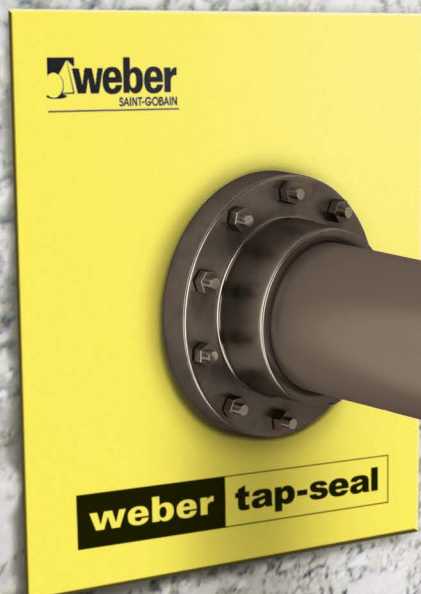



Description	3 - ply waterproof membrane, to be used at intersection of pipes and boards
Material composition	Substrate: two outer layers of polypropylene non - woven coating one inner layer of polyethylene resistant to ageing
Application	As a waterproofing membrane
Colour	Yellow
Total Width	120 mm x 120 mm, 300 mm x 300 mm
Total thickness (approx)	0.5 mm
Material weight (approx)	29.8 g/m
Resistance to temperature (min/max)	- 5 / + 90 deg centigrade

Physical Properties	DIN	Value
Burst Pressure Max	Internal	3 bar
Breaking Load Longitudinal	DIN 527 -3	96 N / 15 mm
Breaking Load Lateral	DIN 527 -3	47 N / 15 mm
Extension Break Longitudinal	DIN 527 -3	86 %
Extension Break Lateral	DIN 527 -3	83 %
Power absorption at 25% elasticity	DIN 527 -3	261 N/mm
Power absorption at 50% elasticity	DIN 527 -3	294 N/mm
Resistance to water pressure (1.5 bar)	DIN, EN 1928	> 1.5 bar
UV - Resistance	DIN, EN, ISO 4982-2	> 500 hours
Chemical Properties:	Resistance after storage over 7 days by room temperature in following chemicals	+ = resistant 0 = weakened - = non resistant
Hydrochloric acid 3%	Internal	+
Sulphuric acid 3%	Internal	+
Citric acid 100g/l	Internal	+
Lactic acid 5%	Internal	+
Potassium hydroxide 3% / 20%	Internal	+ +
Sodium hypochlorite 0.3 g/l	Internal	+
Salt water (20g/l sea water salt)	Internal	+

Health & Safety: weber tap-seal is non-toxic. Use of gloves and goggles is recommended. Any splashes to the skin or eyes should be washed off with clean water. In the event of prolonged irritation, medical advice should be sought. Weber components are non flammable.

#Note: Pot life, open time and adjustability time varies depending on the service conditions viz temperature, humidity and wind factor.

#Note: These test values were obtained during our laboratory tests. Site mixes may show slight differences in performance due to methods of applications.

Disclaimer: Information on this datasheet is to be treated as guideline for usage. Users are advised to undertake a trial for product suitability prior to it's full scale usage. There is no express or implied guaranty/warranty for the results. The company is not liable for any consequential damages.

Marketed by: Saint-Gobain India Pvt. Ltd. – Weber business, **Corporate Office:** 5th level, **Leela Business Park**, Andheri-Kurla Road, Andheri East, Mumbai – 400059 India.
Email: weber-india@saint-gobain.com | **Website:** www.weber.co.in