

The easy solution for fixing tiles and stones.

Presenting Weber tile and stone adhesives.



Tile / Stone fixing and Care solutions



About us :

Weber is a Saint-Gobain brand that cares about building better for people and the planet. It designs, manufactures and markets mortar-based solutions for facade, tiling, flooring, waterproofing, roofing, masonry mortars, plastering mortars and construction chemicals. All these solutions deliver sustainability and performance. Weber serves those who build and those who spend time in buildings while addressing a variety of markets in construction and renovation. With 10,000 people in 60 countries supported by almost 200 production units, Weber is the worldwide leader in mortar-based solutions.

Weber - World leader in industrial mortars



10,000
people



60
countries



200
production
units



More than
2 billion
turnover

Worldwide leader in light and sustainable construction, Saint-Gobain designs, manufactures and distributes materials and services for the construction and industrial markets. All our brands at Saint-Gobain are guided by a common purpose: "MAKING THE WORLD A BETTER HOME".

In India, Saint-Gobain Weber was incorporated in 2004 as a 100% subsidiary of Saint-Gobain India Pvt. Ltd. and commenced commercial operations in 2005. Saint-Gobain Weber India combines global expertise with deep local knowledge to provide solutions in tile and stone fixing, tile joint fillers (grouts), masonry mortars, wall construction solutions, water-proofing chemicals, sealers & impregnators and technical products.



We have manufacturing facilities at 10 strategic locations; Wada - Maharashtra, Chennai - Tamil Nadu, Palakkad - Kerala, Kalol - Gujarat, Raipur - Chattisgarh, Jhagadia - Gujarat, Alwar - Rajasthan, Sonipat - Haryana, Kurnool - Andhra Pradesh, Varanasi - Uttar Pradesh and Kathua - Jammu Kashmir enabling us to provide a highly responsive and quick service to our customers, reducing our carbon footprint. We also offer on-job site training to contractors and applicators to educating them on the most modern techniques of construction. With a wide distribution of distributors and retailers, our products reach over 50+ towns in India.

Saint-Gobain Weber is supported by seven strategic research laboratories globally, which includes Saint-Gobain Research India Pvt. Ltd. Chennai, located in IIT Madras Research Park, and an in-house Research and Development centre located in Wada and Chennai. These together work to provide innovative solutions, specifically created for the Indian environment.



Tile and Stone fixing solutions

Adhesive for
porous tiles

**weberset
premier**

● Grey

weberset premier

weberset premier is a polymer modified, thinset tile adhesive for ceramic tiles, in internal areas. It is suitable for both vertical and horizontal application, over the cementitious substrate.

Features

- Low VOC - for healthy living.
- Excellent adhesion properties - No hacking of substrate required.
- No sag formula - allows for hassle-free application on vertical walls.
- Very low shrinkage prevents debonding and gives longer life to tiles.


Recommended Substrates*

Cementitious screed and plasters in internal areas.

Coverage**

For a 3 mm bed thickness the coverage will be 4 - 4.5 kg/sqmtr.

Pack Size: 20 kg and 40 kg

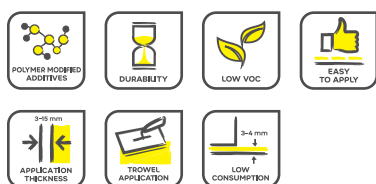

Scan QR Code for more details:



Adhesive for
natural stone
on floor

**weberset
firstwhite**

weberset firstwhite

weberset firstwhite is a high polymer modified thin set natural stone and tile adhesive, specially formulated for fixing small format natural stone on floor and small to medium format ceramic tiles on dry areas of interior floor & interior wall a height of 3 meters.

Features

- High Bond strength.
- Mix and apply - easy to use.
- Suitable for fixing ceramic tile on wall and floor and natural stone on floor.
- Low VOC - For a healthy living, self-curing properties which allow for no-hassle application with minimum labour.
- For installation of natural stone & ceramic tiles on the floor.
- Suitable for internal use only.
- Useful coverage for bed thickness should be 3 - 12 mm and extended upto 15 mm.


Recommended Substrates:

Suitable for cementitious screed, plaster, concrete masonry application in internal areas.

Coverage**

Coverage may go upto 4.2 - 4.5 kg/sqmtr.

Pack Size: 40 kg flexo bag packing



Scan QR Code for more details:



weber set wonder

Adhesive for low porosity tiles on floor & wall
weber set wonder

weber set wonder is a highly polymer modified thin set tile and stone fixing adhesive, which is especially formulated for fixing Ceramic tiles, semi-vitreous tiles, vitrified tiles and natural stones. It is suitable for horizontal and vertical application and adhesive can be used in Internal as well as external* conditions, in dry as well as wet areas. Please refer tile/substrate application table for more details.

Features

- High Bond strength.
- Free flowing product, makes it easier to mix and apply.
- Thixotropic formula - no sag, for easy application on wall.
- Low VOC - For healthy living.
- Suitable for tile-on-tile application.
- Useful for bed thickness of 3-12 mm. May go up to 15 mm in limited extent.
- Suitable for internal and exterior* or large format tile/stone, please refer recommendation chart Can be used for new construction, as well as for renovation over existing floors/facades.
- Self-curing properties, which allows for no-hassle application, with minimum labour.


Recommended Substrates*

Cementitious screed, plaster, concrete masonry, blocks, and existing tiles & stones*, in internal areas. For more details, refer technical data sheet*, or consult Weber Technical services.

Coverage**

Useful for bed thickness of 3 - 12 mm.
Coverage will be **4.05 - 4.35 kg/sqmtr.**

Pack Size: 20 kg and 40 kg

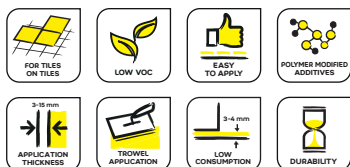

Scan QR Code for more details:



Adhesive for ceramic tiles on wall & floor and low porosity tiles on the floor
weber set classic

weber set classic

● Grey

weber set classic

weber set classic is a high polymer modified thinset tile adhesive, specially formulated for fixing low porosity vitrified tiles on the floor in internal areas. The adhesive can also be used for fixing ceramic tile on wall and floor and suitable for the tile-on-tile application.

Features

- High Bond strength. Thixotropic formula - no sag, for the easy application on the wall.
- Low VOC - For healthy living, self-curing properties which allow for no-hassle application with minimum labour.
- No hacking of the substrate required to achieve the necessary bonding.


Recommended Substrates*

Cementitious screed, plaster, concrete masonry, blocks, and tile-on-tile application in internal areas.

Coverage**

For a 3 mm bed thickness the coverage will be **4-4.5 kg/sqmtr.**

Pack Size: 20 kg & 40 kg

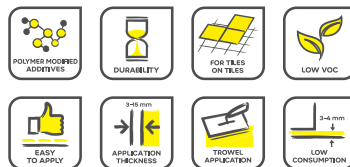

Scan QR Code for more details:



weber set nova

Adhesive For fixing low porosity vitrified tiles on wall & floor, and natural stones on the floor
weber set nova

weber set nova

● Grey
● White

weber set nova is a high polymer modified thinset tile and stone adhesive, specially formulated for fixing low porosity vitrified tiles on wall and floor, and natural stones on the floor. The adhesive can be used for both internal and external as well as in dry and wet areas.

Features

- High Bond strength.
- The free flowing product, makes it easier to mix and apply.
- Easy to use.
- Suitable for both internal and external application.
- Can be used for new construction, as well as for renovation over existing floors/facades.
- Thixotropic formula - no sag, for the easy application on the wall.
- Low VOC - For a healthy living.


Recommended Substrates*

Cementitious screed, plaster, concrete masonry, blocks, RCC, self - levelling screed & tile-on-tile application for fixing vitrified tile and natural stone on floor.

Coverage**

For a 3 mm bed thickness the coverage will be **4 - 4.65 kg/sqmtr.**

Pack Size: 20 kg & 40 kg

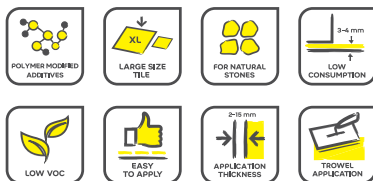

Scan QR Code for more details:



Adhesive for window framing, tile cladding and natural stone flooring
weber set plus-white

weber set plus-white

● White

weber set plus-white

weber set plus-white is a polymer modified cementitious tile adhesive used for fixing vitrified tiles and natural stones on wall and floor, for both internal as well as external areas. It has been specially modified to give high bond with natural stone, even when used at high bed thickness, making it appropriate to be used on window sills/jams.

Features

- Easy to apply.
- High bonding strength.
- Can be used at higher bed thickness.
- Premixed material - Add only water.
- Slip-resistant for vertical application.


Recommended Substrates*

Cementitious screed, plaster, concrete masonry, blocks, and tile on for internal as well as external areas. Specially recommended to be used on window sills/jams.

Coverage**

For a 3 mm bed thickness the coverage will be **4.35 - 4.65 kg/sqmtr.**

Pack Size: 20 kg

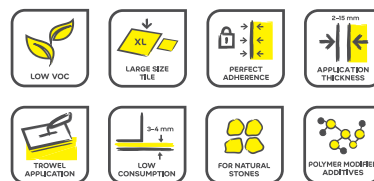

Scan QR Code for more details:



Fast Setting adhesive for fixing tiles & stones

weber set fastfix

weber set fastfix is a fast setting, highly polymer modified, high performance thinset adhesive, for fixing tiles, stones, on a variety of surfaces, for wall and floor application, in internal as well as external area. It is designed for installation of tile & stones for overnight repair, renovation and faster fixing, supplied as a dry mix mortar, to which water needs to be added before application.

Features

- Highly polymer modified: provides high structural adhesion.
- For overnight repair and renovation of tile and stone due to quick setting and hydration time.
- No hacking of substrate required to achieve the required bonding. Grouting can be done on wall & floor within 3-6 hrs.
- Light foot traffic after 3-6 hrs and completely cured after 24 hrs of tile & stone installation.
- Easy to use and grouting can be done after 3 hrs.
- Water resistant, making it suitable for swimming pools, bathroom, kitchen, sauna and spa.
- Sustains heat ageing, making it ideal for high temperature locations like jacuzzi, sauna, etc.

Recommended Substrates*

For fixing tiles, stones and mosaics, on a variety of surfaces, for wall and floor application, in internal as well as external area. It is designed for installation of tile & stones for overnight repair, renovation and faster fixing.

Coverage**

For 3 mm bed thickness coverage will be 3.7 - 4.1 kg/sqmtr.

Pack Size: 20 kg



Scan QR Code for more details:



in.weber/weber-set-fastfix

Adhesive for natural stones cladding

weber set firm

- Grey
- White

weber set firm

weber set firm is a highly polymer modified, high-performance thinset adhesive, for tiles, mosaics, and natural stones on a variety of surfaces. It can be used for both vertical and horizontal applications as well as in indoor and outdoor use.

Features

- Highly polymer modified adhesive which provides high structural adhesion, also allows users to use it on a variety of substrates for fixing a range of tiles and stones.
- Can be used for new construction as well as for renovation over existing floors/facades.
- No hacking of substrate required to achieve the necessary bonding.
- No sag formula: allows for hassle-free application on vertical walls, without any slippage.
- Water resistant, making it suitable for swimming pools, bathrooms, kitchen, saunas, and spa.
- Sustains heat ageing, making it ideal for high-temperature locations, for outdoor use and also for hot temperature applications, like Jacuzzi, sauna, etc.
- No shrinkage prevents debonding and gives longer life to tiles and stones.

Recommended Substrates*

Cementitious screed, plaster, concrete masonry, blocks, RCC, self-levelling screeds, cementitious waterproofing, gypsum plaster, and tile-on-tile on tile and stone.

Coverage**

For a 3 mm bed thickness the coverage will be 4.2 - 4.5 kg/sqmtr.

Pack Size: 20 kg



Scan QR Code for more details:



in.weber/weber-set-firm

Adhesive for glass mosaics

weber set glass mosaic

- White

weber set glass mosaic

weber set glass mosaic is a cement based polymer modified tile adhesive with the finest particle size, specially designed for fixing glass mosaic for internal as well as external applications. It is also suitable for fixing all types of ceramic wall and floor tiles, mosaics, marble, terrazzo, natural stone, including swimming pools.

Features

- Brightest white adhesive enhances the color of glass mosaic.
- It is water resistant, can be used to fix various types of tiles including glass mosaics in swimming pools & other wet areas.
- It can sustain heat ageing.
- It has no shrinkage and is particularly suited for situations where some movement, deflection or limited shrinkage is likely.
- Absorbs dynamic loads - suitable to use in swimming pools where the water pressure or load may vary.
- Quick setting times, which helps in faster construction.
- Can be used at depths upto 10 m underwater.


Recommended Substrates*

Especially recommended for glass mosaic and stones due to its white color, which adds color and aesthetic look. Recommended for application on cementitious substrates and self-levelling screeds, blocks and suitable under wet and dry conditions including swimming pools and fountains.

Coverage**

For 2 mm bed thickness coverage will be 2.6 - 2.8 kg/sqmtr.

Pack Size: 20 kg

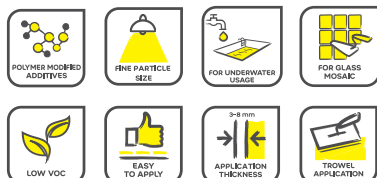

in.weber/weber-set-glass-mosaic



Adhesive for tiles & stones in vibration prone areas

weber set flex

- Grey
- White

weber set flex

weber set flex is a high polymer modified adhesive for fixing tiles and natural stones of large format both on the wall as well as on the floor, where structural movement is expected - recommended for external cladding due to high bond strength.

Features

- Excellent adhesion properties, no slip is observed on vertical applications.
- The larger quantity of the material can be mixed at a time due to its longer pot life.
- Suitable for heavy duty application.
- Low VOC.

Recommended Substrates*

Cementitious screed, plaster, concrete masonry, blocks, RCC, self-levelling screeds, cementitious waterproofing gypsum plaster, tile-on-tile and tile-on-stone.

Coverage**

For a 3 mm bed thickness the coverage will be 4.05 - 4.35 kg/m².

Pack Size: 20 kg



Scan QR Code for more details:



in.weber/weber-set-flex

weberset flex+

High bond strength adhesive for tiles and stones in vibration prone areas
weberset flex+

weberset Flex+ is a special polymer modified, creamy smooth thinset adhesive with excellent adhesion strength and flexibility that makes it an ideal product for tile installation in vibration prone areas and even in external conditions like vertical cladding in facades. Non sag, creamy mix consistency makes it a preferred choice of applicators.

- Grey
- White

Features

- Suitable for fixing tile/stone in dry as well as wet areas.
- Creamy smooth application, effortless and low noise notching makes it user friendly.
- High coverage and sag resistance provide hassle free economic tile/stone installation.
- Sustains heat ageing which makes it ideal for outdoor use and also for hot temperature applications like Jacuzzi, sauna etc.


Recommended Substrates*

Suitable for applying large vitrified tiles and natural stones on a variety of substrates even with low to medium vibration prone areas.

Coverage**

3.6 - 3.9 kg/sq.m per 3 mm of thickness.

Pack Size: 20 kg double layered BOPP bags

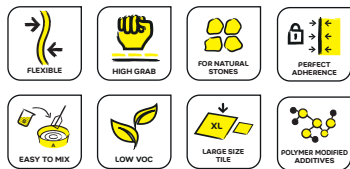

Scan QR Code for more details:



weberset monohiflex

Adhesive for fixing thin tile artificial & impregnated stone
weberset monohiflex

- White

weberset monohiflex is a single component, high performance polymer modified tile adhesive for fixing large format thin tile, impregnating stone, and large size natural stones with nominal to moderate substrate movement at internal and external conditions for wall and floor.

Features

- Especially suitable for fixing large format thin tile, impregnating stone, natural and impregnated stone.
- Single component product just water to be added.
- Flexible to withstand moderate substrate movement.


Recommended Substrates*

Substrates subjected to moderate vibration, including cementitious screed, plaster, concrete masonry, blocks, RCC, self levelling screeds, cementitious waterproofing, gypsum plaster, and tile-on-tile on tile and stone. For more details, refer technical data sheet, or consult Weber Technical services.

Coverage**

For a 3 mm bed thickness the coverage for Single spreading will be 3.6 to 3.9 kg/sqm. Double spreading can be done.

Pack Size: 20 kg double layered BOPP bags



Scan QR Code for more details:



weberset ultra

Adhesive for fixing artificial & impregnated stone
weberset ultra

- White

weberset ultra is a two-component high performance modified adhesive used for fixing impregnated stone, and large format tiles and stones where nominal to moderate substrate movement is expected. Recommended for both internal and external application for wall and floor.

Features

- Especially suited for fixing impregnated stone and composite marble.
- Two component product.
- Highly flexible, to withstand medium substrate movement.
- Ultimate adhesion strength.
- Longer workability for easy and faster application.
- Low VOC.


Recommended Substrates*

Substrates subjected to moderate vibration, including cementitious screed, plaster, concrete masonry, blocks, RCC, self-leveling screeds, cementitious waterproofing, gypsum plaster, and tile-on-tile on tile and stone.

Coverage**

For a 3 mm bed thickness the coverage for Single spreading will be 5.1 to 5.4 kg/sqm. Double spreading can be done.

Pack Size: 16 kg Component A + 5 kg Component B

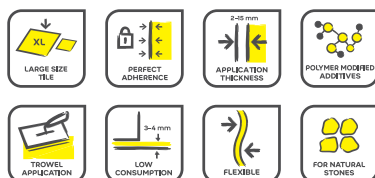

Scan QR Code for more details:



weberfix drywall

Adhesive for large format stone on drywall and plywood
weberfix drywall

weberfix drywall is a two-component high-performance tile & stone adhesive, used for almost all types of tiles and stones, over nearly all types of substrates including moisture sensitive marble & agglomerates. weberfix drywall is specially formulated, for fixing large format tiles and stones on drywall and plywood.

Features

- Moisture free system: Does not damage wooden substrates or tiles, and water sensitive stone.
- Very High Bond strength.
- Two Component adhesive: prevents wastage, as the only quantity which is required has to be mixed.
- Fast Setting.
- Can do cladding up to 50 ft. height, without any supporting bracket*.
- Under tile treatment of stone (to prevent discoloration) is not required.
- Can be used for fixing moisture sensitive stones, like green marble.
- Reaction bases system, and thus not harshly affected by temperature & humidity.
- Can be used on touch dry surface of the concrete. Do not need to wait for the substrate to get completely dry.

Recommended Substrates*

Especially designed for fixing large format tiles and stones on cementitious substrates, all types of drywall like plywood, gypsum boards, bison panel etc.

Coverage**

For every 3 mm bed thickness the coverage will be 1.62 kg/sqmtr.

Pack Size: 20 kg (Component A: 15 kg Bucket Component B: 5 kg Bucket)
5 kg (Component A: 3.75 kg & Component B: 1.25 kg inside bucket)



Scan QR Code for more details:



**PU based
thinset adhesive -
for all types of
tiles & stones on
any substrate**
**weberfix
PU**

weberfix PU

weberfix PU is a two component, ready to mix, polyurethane based thinset adhesive for fixing all types of tiles and stones on a variety of substrates including metal surfaces and drywall boards. It is suitable for application on interior as well as exterior wall and floor. It provides much needed flexibility for building world class architectural designs by removing constraints in terms of substrate and tile types.

Features

- Suitable for tile and stone cladding on high rise buildings.
- No spacer required if adequate constructions joints are provided in tile and stone cladding.
- Very high bond strength and chemical resistance.
- Suitable for heated sub-floors and areas subjected to thermal shock and freezing.
- Ideal for tiles and stones prone to deformation due to water absorption and thermal expansion.
- Suitable to install all tiles and stones including glass (not for PU coated glass) and metal tiles.
- No shrinkage.
- No sag formula: allows for hassle free application on vertical walls, without any slippage.
- Moisture free system: Does not damage wooden substrates or tiles, and water sensitive stone like green marble.
- Useful for bed thickness of 2-6 mm may go upto 10 mm in limited extent.

Recommended Substrates*


Suitable for all surfaces like metal, plywood, drywall, AAC wall panels, PU waterproofed surface, tile-on-tile & tile-on-stone, lime mortar surface and cementitious plasters.

Coverage**

Approx - **4.6 kg/m²** per **3 mm** of thickness

Pack Size: 10 kg bucket

(Part A : Part B - 9:1 by weight)

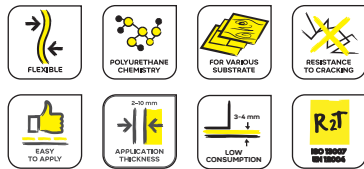

Scan QR Code for more details:



in.weber/weberfix-PU



**PU thinset
adhesive-For large
tiles & stones on
any substrate**
**weberfix
PU Hiflex**

weberfix PU Hiflex

Weberfix PU Hiflex is a two-component, ready-to-mix polyurethane thin-set adhesive for fixing all types of tiles and stones on any substrates including, metal and all glass surfaces. Recommended for application on the interior and exterior walls and floor. Its PU formulation provides elastic flexibility and excellent bonding thus making it an ideal choice for all cladding applications.

Features

- Suitable to install any type of tile and stone, including glass and metal tiles.
- No Spacers are required if adequate constructions joints are provided in tile and stone cladding.
- For internal and external walls and floor.
- Suitable for large, thin size tiles and stone cladding on high-rise buildings.
- Easy workability & No shrinkage, prevent debonding and gives longer life to tiles and stones.
- Excellent Bond strength and chemical resistance.
- For internal and external wall and floor application.

Recommended Substrates*


Suitable for application on all substrates like wood, metal, glass, rubber, PVC, linoleum.

Coverage**

Approx - **4.8 kg/m²** per **3 mm** of thickness

Pack Size: 5 kg Bucket

(Component A - 2.5 kg, Component B - 2.5 kg)



Scan QR Code for more details:



in.weber/weberfix-PU-Hiflex



**High strength
& quick setting
epoxy adhesive
for vertical
tile/stone cladding**
**weberfix
SpotOn**

weberfix SpotOn

Weberfix SpotOn is a two-component epoxy adhesive that supports spot bonding method of tile/stone installation on variety of interior & approved** exterior surfaces including wall, floor and ceilings. Suitable for thin bed application for floor tile installation. Its high bond strength and quick setting properties provide higher productivity and a very economical solution for vertical tile/stone cladding.

Features

- Suitable for internal & approved external surfaces.
- Suitable for thin bed application for floor tile installation.
- Ideal for spot bonding on vertical application.
- High adhesion strength and quick setting properties.
- Ease of application insures speedy installation and high productivity.

Recommended Substrates*

Can be used for fixing tile/stone on the wall, floor (thin bed application only), and ceiling areas.

Coverage**

1.62 kg/m² for **1 mm** full bed thickness and 11 sqm with 10% of dab over tile area.

Note: The coverage may vary depending on surface undulations & other site conditions.

Pack Size: 2 kg (1 kg resin + 1 kg hardener)



Scan QR Code for more details:



in.weber/weberfix-spoton



**Adhesive for
tile and stone
on metal and
glass surface**
**weber epoxy
adhesive**

weber epoxy adhesive

weber epoxy adhesive is a three-component, heavy duty, chemical resistant adhesive for fixing tile and stone of small and big format on wall and floor. It provides excellent, highly durable bond strength for fixing tile and stone on various surfaces. Can be used for both dry and wet as well as external and internal applications.

Features

- Excellent adhesion properties - tile and stone can be fixed on the surface like metal sheet, aluminium panels, glass, plywood, and gypsum board.
- Highly durable and impact resistance.
- Can be used in chemical prone areas.
- Can be used at a higher height level without mechanical fixing.
- Can be used for fixing tile and stone on the ceiling and elevated structures.

Recommended Substrates*


On metal, MS sheets, aluminum panel, RCC, self-levelling screed, acrylic sheet, metal ACP sheets, fiber-cement, gypsum board, plywood & all cementitious substrate to be added.

Coverage**

For **3-20 mm** bed thickness the coverage will be **5-6 kg/sqmr**.

Pack Size:

5 kg weber bond poxy (resin-hardener kit)
15 kg weber bond poxyfill (filler)



Scan QR Code for more details:



in.weber/weber-epoxy-adhesive





Only for floor
tilling

weberfloor TopBond

Binder for screed
for wet on wet
and hard screed
application
weberfloor
Topbond

Weberfloor Topbond is a cement based mineral binder with preblended fibre and polymer formulation to achieve high strength, quick drying, and compensated shrinkage, for indoor and outdoor screeds. Ready to use binder just required to addition of a suitable aggregate and water.

Features

- Fast setting (Rapid drying / Quick hardening) and no Curing required.
- Prolonged workability & compensated shrinkage.
- Can be used for the repair of existing floor screeds.
- Can be used for internal and external screeds.
- No efflorescence.

Recommended Usage

- Binder for screed.
- Dry screed for underlay application.
- To fix vitrified tiles and natural stones by wet-on-wet technique.
- Ideal for use on cementitious surfaces like concrete, PCC, IPS, low-density concrete and heat-insulating & soundproofing panels.

Coverage**

2.23 kg/m² per cm of thickness

Pack Size: 25 kg bag



Scan QR Code for more details:



in.weber/weberfloor-topbond



weber CEMENTONIC™

Powder based
additive for high
performance
cement slurry
weber
CEMENTONIC™

weber cementonic is a powder based high performance additive, for traditional tile laying method, using a cement slurry over freshly laid screed. It can also be used to enhance the strength of the screed. Use of weberfloor cementonic can greatly reduce the total cost of application, by vastly increasing the coverage of cement slurry. Mix Cementonic to the water and then use this water for making the cement slurry.

Features

- In depth penetration of cement slurry provides strength to overall system.
- Increases the cohesive strength of the Cement bedding (screed) and also increases the bonding between the tile and screed.
- Imparts self-curing properties to screed and slurry.
- In powder form and comes in easy-to-handle pouches that allows easy usage, and prevents wastages.
- Greatly increases pot life, ensuring higher speed of tiling and no wastages.
- Increases adjustability time resulting in ease of application and high productivity.

Recommended Substrates: Only for floor applications

- For making cement screed bed for tiling.
- For laying tiles on to freshly laid screed using traditional method of fixing.

Coverage**

300g for 50 kg cement bag

Pack Size: 300 gm pouch



Scan QR Code for more details:



in.weber/weberfloor-cementonic



weberfloor slurrybond

weberfloor slurrybond

Weberfloor Slurrybond is a highly polymer modified, cementitious adhesive, that can be used in slurry form, on wet screed, for wet-on-wet fixing of tiles and stones, as well as an adhesive paste for fixing tiles and stones on floor and wall. Replaces the cement slurry which has been traditionally used for fixing floor tiles/stones. Provides additional strength to the screed itself, and increases the tiling speed.

Features

- Gives four times more coverage than Cement slurry.
- Free flowing - no need for troweling and is shrink resistant.
- Dual use: Can be used as a slurry adhesive, or a thinset tile adhesive.
- Very high pot life ensures higher speed of tiling, and no wastage.
- High adjustability time reduces wastage.

Recommended Substrates*

- As Slurry - to be used for floor applications. Not to be used on preset screed, or on wooden, metal and glass substrates.
- As Thinset Adhesive - Can be used for internal/external floor as well as wall applications in accordance with the Tile/substrate sheet.

Coverage**

1.25 kg/sqm for every mm of bed thickness

Note: The coverage will vary depending on surface undulations.

Pack Size: 20 kg bag



Scan QR Code for more details:



in.weber/weberfloor-slurrybond



Tile and Stone Care

Under-tile
impregnator
for stones prone
to discoloration

**webersys
stoneprotect**

webersys stoneprotect

webersys stoneprotect is a commonly used sealer for porous stones & tiles. It protects the surface of stone by penetration. It can be used for tiles, stones bricks, concrete and other porous substrate. It prevents water to entering stone pores & provides excellent water repellency.

Features

- Water based formulation expresses non-flammable properties.
- Ready to use product. • Protects grout joint against soil and strains.
- Resistant to weather condition*.

Technical Parameter

Specific gravity : 1.02+/-0.01
pH Value : 7-9
Colour : Milky white
Viscosity : B4 cup 12-16 sec

Consumption

12-20 sqmtr/L for double coat. Consumption may vary depending on surface conditions and porosity material.

Pack Size: 20 L Drum & 1 L Bottle



Scan QR Code for more details:



Solvent based
impregnating
sealer for tiles
and stones

**webersys
stoneseal**

webersys stoneseal

webersys stoneseal is a solvent based sealer designed for the protection of natural and synthetic stone. The unique formulation gives an excellent water repellent as well as oleophobic, i.e. oil repellent properties. It exhibits high resistance to oil and water stain on the surface treated with weber stoneseal. The treated pores of the surface form an invisible barrier allowing the vapor diffusion due to penetrating effect. It sets to form hard-wearing film while maintaining the natural color of stone and tile.

Features

- Solvent-based system used for even low porous stone and marble.
- Easy to apply using brush, sponge or cloth. • Can be applied for both external and internal application. • Highly durable and economical. • Ready to use no dilution required at the site. • Superior coverage. • Seal and protect against the stain of eatables. • Deep penetration into substrate. • Resistant to UV rays.

Technical Parameters

Appearance : Light Yellowish
Density at 25°C : 0.86 +/- 0.02 g/cc

Consumption

3sqmtr – 30 sqmtr/L (consumption may vary depending on the porosity level of the surface.)

Pack Size: 20 L Drum & 1 L Bottle



Scan QR Code for more details:



webersys aquaseal

Water based
impregnating
sealer for tiles
and stones

**webersys
aquaseal**

webersys aquaseal is a water-based sealer designed for the protection of natural and synthetic stone. The unique formulation gives an excellent water repellent as well as oleophobic, i.e. oil repellent properties. It exhibits high resistance to oil and water stain on the surface treated with webersys aquaseal. The treated pores of the surface form an invisible barrier allowing the vapour diffusion due to penetrating effect. It sets to form hard-wearing film while maintaining the natural color of tile and stone.

Features

- Water-based system used for even low porous stone, limestone, sand-stone, granite quarry stone, cement grouts and marble.
- Easy to apply using brush, sponge or cloth.
- Can be applied for both external and internal application.
- Highly durable and economical.
- Ready to used no dilution required at the site.
- Superior coverage.
- Seal and protect against the stain of eatables.

Technical Parameters

Appearance : Clear liquid
Density : 1.02 + 0.02 g/cc
pH value : 7 - 9

Consumption

3sqmtr – 35 sqmtr/L, (consumption may vary depending on the porosity level of the surface.)

Pack Size: 20 L Drum, 5 L & 1 L Bottle



Scan QR Code for more details:



Heavy duty
tile cleaner for
tough stains

**weberklin
ceraplus**

weberklin ceraplus

weberklin ceraplus is a specially formulated ceramic surface cleaner and tough cement stain remover. Can be used on all types of ceramic material and can also remove salt buildups due to stagnant water/continuous exposure to water with ease.

Features

- Easily removes even tough cement stains.
- No etching of ceramic products.
- Does not affect the glaze of tiles.
- Economical in use.
- Removes all residual substances, like soap, scum deposit, mineral and salt deposits easily.
- When used before grouting tile joints, provides contamination free grout, with longer life and better color performance.

Technical Information

Colour : Blue
Specific Gravity : 1.05 @ 27°C
Soaking time : 3-5 min

Pack Size: 1 L Bottle & 5 L Jerry can



Scan QR Code for more details:



**weber
notched
trowel**

Product description

6mm x 6mm weber notched trowel suitable for 3mm bed thickness.

Features

Special high wear resistance.
Ergonomic handle for ease of use.
Perfect flatness of the plate
Improves adherence of the mortar on to work surface.

**weber
tile
spacer**

Product description

Spacers for obtaining a perfect finish in any tile and stone installation work.

Features

For perfect spaces in between tiles.
Quality base material, without impurities or imperfections.
Suitable for all types of tiles and stones.
Available in 2, 3, 4, 5 and 10 mm thickness.

**Easy-to-use
tile grouting
tool
webertool
squeegee**

Product description

webertool squeegee is easy-to-use tool for tile joint filling.

Features


Does not scratch the surface of the tile.
Requires less effort and increases productivity.



Consumption calculator

Download center (www.in.weber)

Scan QR Code for Download center



in.weber/downloadcenter



You can



View



Bookmark



Save



Send Via email

Scan QR Code for Weber app



in.weber/weberapp

TILE & STONE FIXING



in.weber/complete-tile-and-stone-fixing-solution

Scan QR code for complete tile and stone fixing solutions


TILE & STONE CARE



in.weber/complete-tile-and-stone-care-solution

Scan QR code for complete tile and stone care solutions

Scan QR Code for Weber App



<https://goo.gl/d39avs>

Scan QR code to download android app for product information and technical data for our complete product range, directly from your smartphone.



*For more details, refer technical datasheet, or consult Weber technical services.

**Note: The coverage will vary depending on surface undulations.

***Please note weber logo was renewed recently, Illustrations of packaging artworks for same are currently being revised.

Saint-Gobain India Pvt. Ltd. - Weber Business,

Corporate Office: 5th Level, Leela Business Park, Andheri-Kurla Road, Andheri East, Mumbai - 400 059. India.

Visit: www.in.weber | Email us: weber-india@saint-gobain.om

Contact us: 18002678889

Stay connected with us:

